

HARVEST THE

POWER OF THE SUN



The new
SOL 25 PLUS solar
collector offers all
the latest features
known to the
industry

Over 30 Years
of Solar Panel
Experience



SOL 25 PLUS complies
with ISO 9806

ISO 9001
CERTIFIED

FLAT PLATE SOLAR COLLECTOR SOL 25 PLUS

Highly efficient solar collector is suitable for many types of applications. Features include:

- Highly selective Bluetec CERMET ceramic/metal coating
- Copper absorber with copper fluid tubes
- Low iron tempered solar glass
- Durable corrosion resistant aluminum frame
- Low profile at 3" thickness
- Full complement of custom mounting hardware is available

*Leaders in
Thermal Solar Technology*

STIEBEL ELTRON
Simply the Best

TOLL FREE **800.582.8423**


www.stiebel-eltron-usa.com

info@stiebel-eltron-usa.com

THE POWER OF THE SUN

FLAT PLATE SOLAR COLLECTOR SOL 25 PLUS

STIEBEL ELTRON

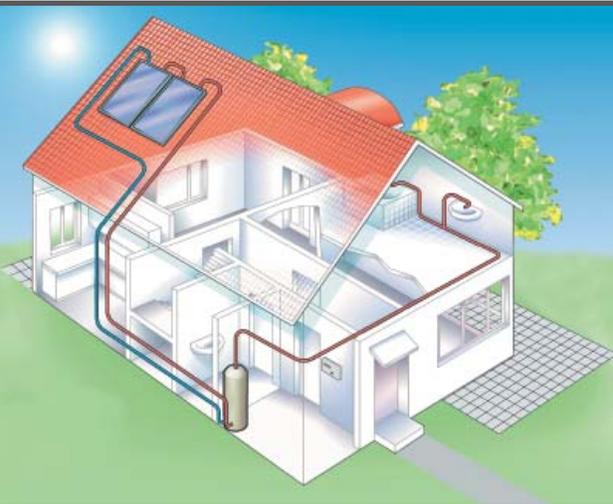

The SOL 25 PLUS is ideal for many applications !

- Residential or commercial water heating
- Space heating
- Swimming pools

Advantages Include:

Maximum Efficiencies

The SOL 25 PLUS is a highly efficient thermal collector. The net absorber surface of almost 28 sq feet results in a maximum output of 21,000 btu/day per panel. The SOL 25 PLUS also offers features such as a high selective absorber coating, low-iron, tempered solar glazing, and very effective insulation around the absorber plate. The internal fluid tubes are copper.

Installation Time Is Minimized

The large panel size and the availability of a full complement of custom designed mounting accessories minimizes the installation costs.

Appealing Design

The SOL 25 PLUS has a low profile, making it visually less obtrusive and compatible with existing architectural designs.

Lasting and Reliable Energy Saving Investments

Stiebel Eltron uses only the most durable materials. The SOL 25 PLUS is the culmination of over 30 years of experience in the thermal solar business.

Specifications

Total surface area	sqft	29.06	sqm	2.7
Net effective surface area	sqft	28	sqm	2.6
Collector output range	Btu / day	21,000	W / day	6155
Max. temp.	°F	410	°C	210
Typical transfer flow rate	Gal / h	13 - 80	l / h	50 - 300
Working operating pressure	PSI	50.7	bar	3.5
Max. operating pressure	PSI	87.0	bar	6
Tested to pressure	PSI	160	bar	11
Pressure loss	PSI	0.44	m / bar	30
Dimensions	in.	87 15/16 x 48 1/8 x 3 1/16	mm	2233 x 1223 x 78
Weight without heat transf. fluid	lb.	108	KG	49
Recommended mounting angle			10° - 90°	
Plumbing connections	in.	3/4" BSOT		
Frame		anodized aluminum, corrosion resistant		
Absorber		copper, Bluetec CERMET ceramic/metal selective surface		
Thermal insulation		mineral wool		
Absorptivity / emissivity		95 % / 5 %		
Light transmission		92 %		
Heat transfer fluid		non-toxic polypropylene glycol solution		

	<p>This product certified by the Solar Rating and Certification Corporation c/o FSEC, 1679 Clearlake Road Cocoa, FL 32922 (321)638-1537 www.solar-rating.org SRCC Document OG-100</p>	<p>Stiebel Eltron 17 West Street West Hatfield, MA 01088 Model No.: Sol 25 Plus Gross Area 2.73 m (29.42 ft) Serial Number:</p>	<p>Mildly Cloudy Day Rating in Category C 22 MJ/day 21 Mbtu/day</p>
---	---	---	---

Distributed by:

STIEBEL ELTRON, Inc.

17 West Street, West Hatfield, MA 01088
Phone: 413.247.3380 • 800.582.8423
Fax: 413.247.3369

www.stiebel-eltron-usa.com

Printed on chlorine-free paper using soy-based inks.