


CERO Series: CERO 12, CERO 15, CERO 18 | NEMA 4/4X

Specifications

Model	CERO 12, CERO 15, CERO 18
Phase	3-phase
Inlet/outlet pipe connection	3/4" female NPT
Heat exchanger material	316L stainless steel
Enclosure rating	NEMA 4/4X shown, NEMA 3 available
Operating pressure range	4 - 150 psi (0.27 - 10.3 bar)
Maximum temperature output	185 °F (85 °C)
Temperature adjustment range	60 - 185 °F (16 - 85 °C)
Temperature adjustment increment	1 °F (1 °C)
Number of heating elements*	3
Minimum activation flow	0.5 gpm (1.9 l/m)
Maximum flow at 60 psi	15 gpm (56.7 l/m)

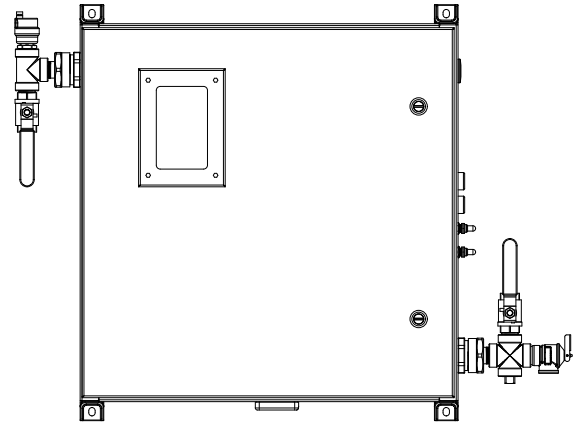

*CERO-018-480D is a 6-element heater.

Model	Part Number	Voltage	Phase	kW	Amps	3P Breaker Size (A)	Temperature Rise °F (gpm = kW x 6.83 / Δt)				
							1 gpm	2 gpm	3 gpm	4 gpm	5 gpm
CERO 12	CERO-012-208D	208	3-phase delta	10.15	28.17	35	69	35	23	17	14
	CERO-012-240D	240	3-phase delta	12.50	30.07	35	86	43	29	21	17
	CERO-012-400Y	400	3-phase wye	11.48	16.57	20	85	42	28	21	17
	CERO-012-480Y	480	3-phase wye	11.10	13.35	15	76	38	25	19	15
CERO 15	CERO-015-208D	208	3-phase delta	13.52	37.53	45	92	46	31	23	18
	CERO-015-240D	240	3-phase delta	13.51	32.51	40	92	46	31	23	18
	CERO-015-400Y	400	3-phase wye	12.41	17.91	20	>100	56	38	28	23
	CERO-015-480Y	480	3-phase wye	16.65	20.03	25	>100	57	38	28	23
CERO 18	CERO-018-208D	208	3-phase delta	18.00	49.96	60	>100	62	42	31	25
	CERO-018-240D	240	3-phase delta	18.00	43.30	50	>100	62	42	31	25
	CERO-018-400Y	400	3-phase wye	16.53	23.86	30	>100	56	37	28	23
	CERO-018-480D	480	3-phase delta	18.00	21.65	25	>100	57	38	28	23
	CERO-018-480Y	480	3-phase wye	16.66	20.04	25	>100	62	42	31	25




Conforms to ANSI/UL Std. 499
 Certified to CAN/CSA
 Std. C22.2 No.88



6 years against leakage /
 2 years against defects in
 workmanship & materials





Flow Rate

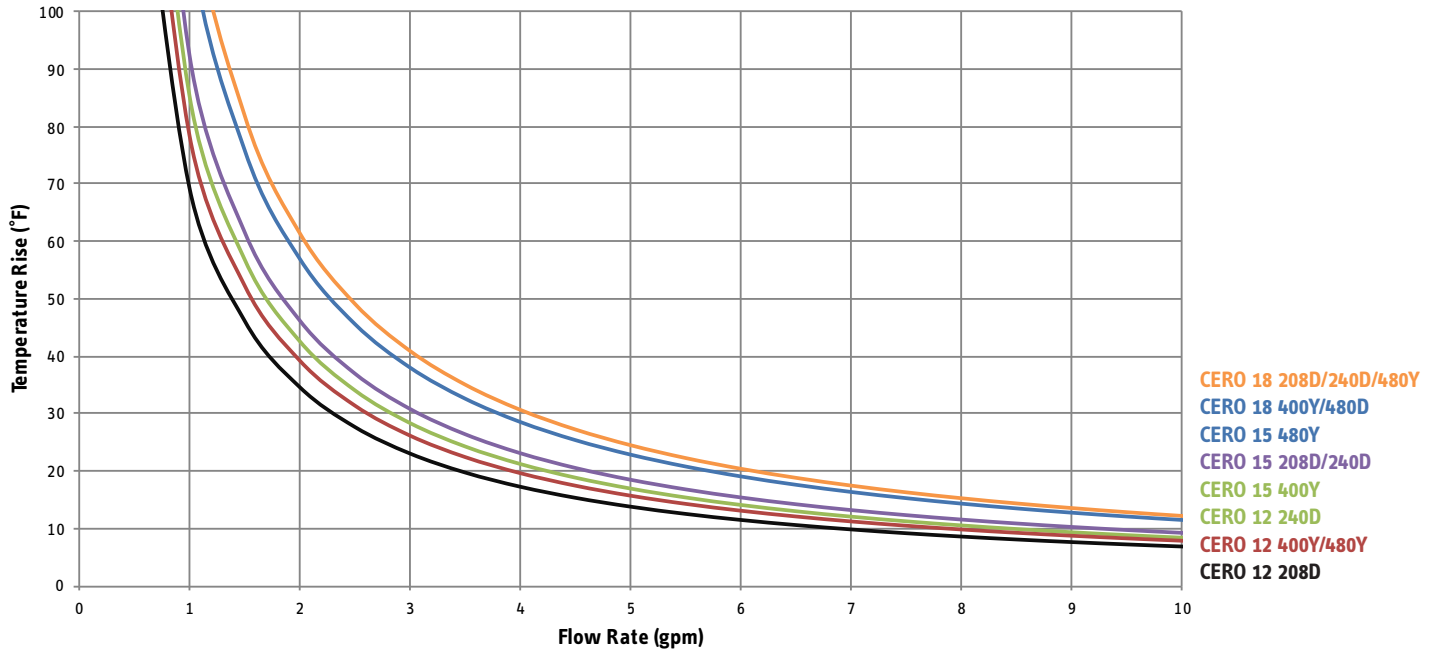

Dimensions

Dimensions

- A $26 \frac{3}{8}$ " (670 mm)
- B $9 \frac{1}{2}$ " (241 mm)
- C 24 " (610 mm)
- D 24 " (610 mm)
- E 4 " (102 mm)
- F $35 \frac{7}{8}$ " (911 mm)
- G $31 \frac{1}{4}$ " (794 mm)

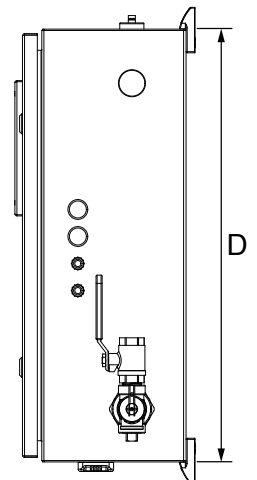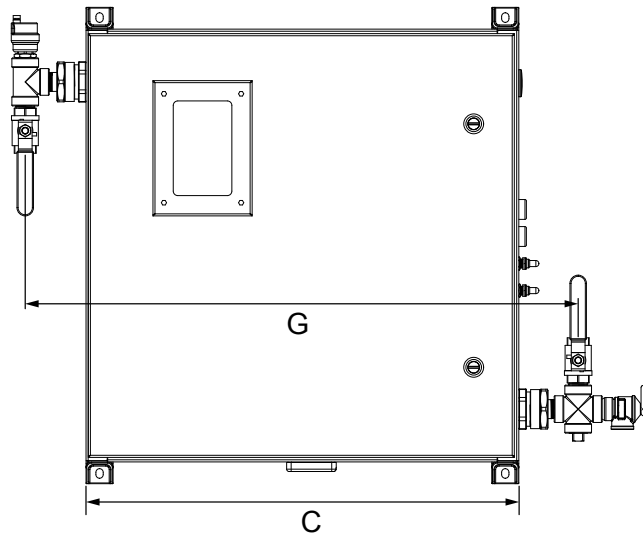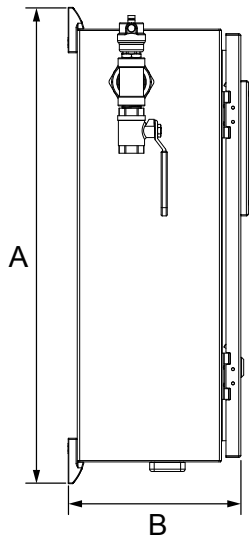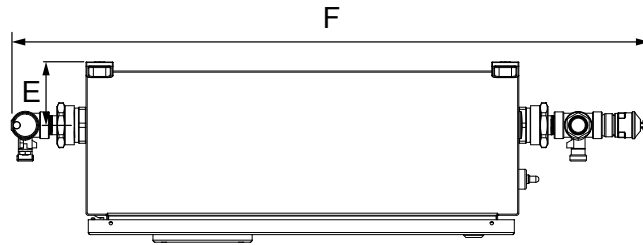

rev. 12.2019 Due to our continuous process of engineering and technological advancement, specifications may change without notice.