










DHX 15 Select




Electric Tankless Water Heater Sizing Guide

DHX 15 Select		42°F	52°F	62°F	72°F
14.4 kW	MAX. FLOW RATE	1.6 GPM	1.9 GPM	2.3 GPM	3 GPM
	POSSIBLE FIXTURES	 OR 	 OR 	 OR 	 OR 

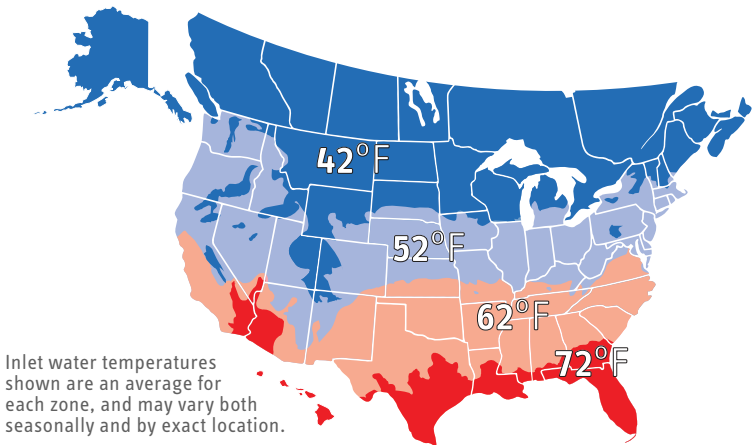Flow rates shown are correct for installation with 240 V power. Please contact technical support if installation will be with 208 V power.



FIXTURES & FLOW RATES
for model possibilities and temp. for max. flow rate calculation


SINGLE LAV SINK (Range 0.5-1.5)		90°F
SHOWER (Range 1.0-2.5)		105°F
KITCHEN SINK (Range 1.0-2.2)		105°F

Higher temps reduce flow rates

Continued on next page ›

DHX Trend & Plus

Temperature rise vs. flow rate curves

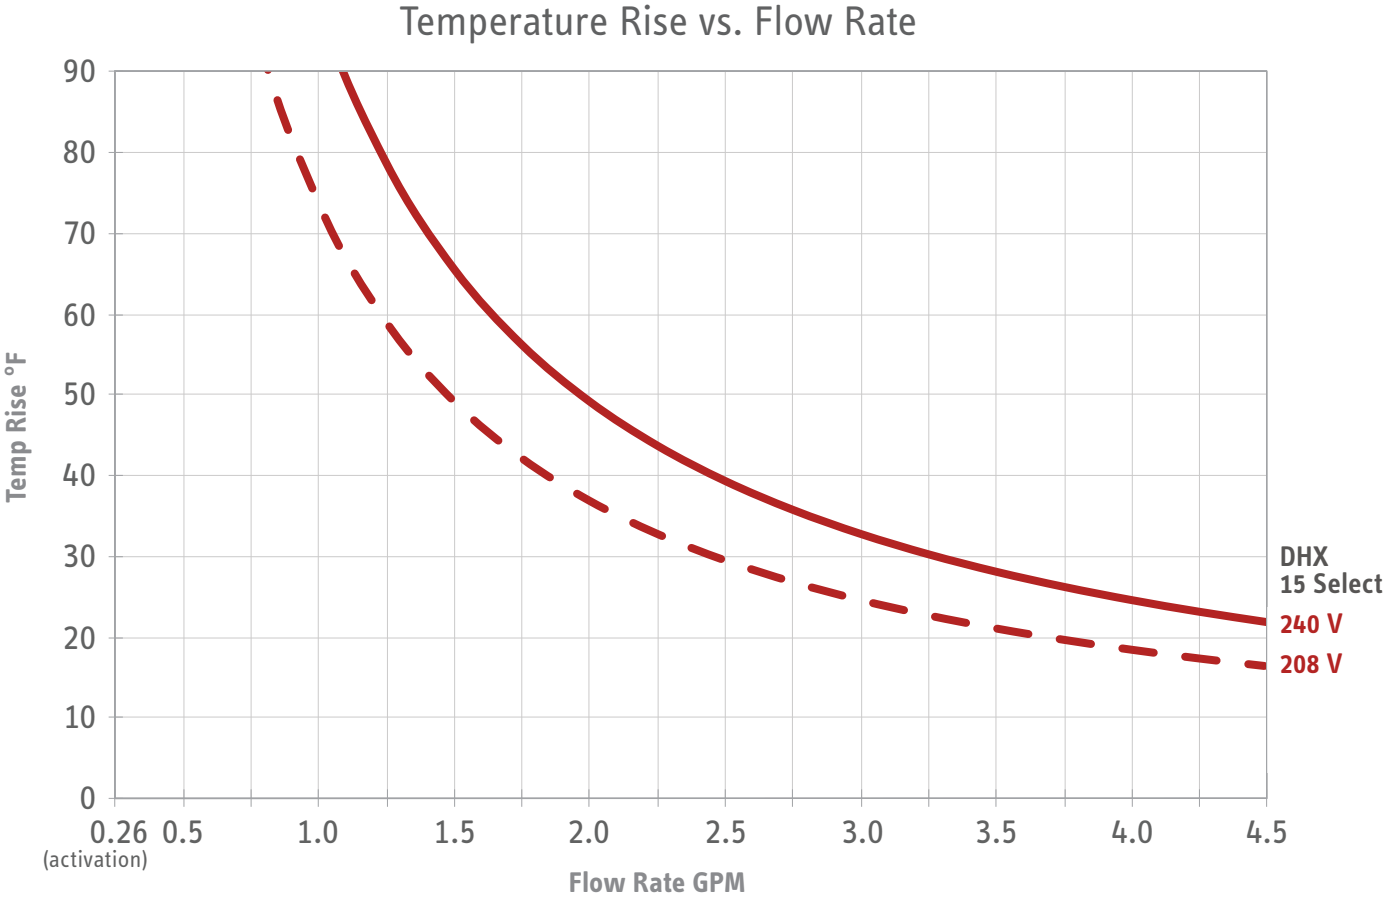

rev. 2.2024 | Due to our continuous process of engineering and technological advancement, specifications may change without notice.