

DHX Trend & Plus

Electric Tankless Water Heater Sizing Guide

		42°F	52°F	62°F	72°F	
DHX 3.5-1 Trend	3.5 kW	MAX. FLOW RATE	0.5 GPM	0.6 GPM	0.85 GPM	1.3 GPM
		POSSIBLE FIXTURES				

DHX 6-2 Trend	6.0 kW	MAX. FLOW RATE	0.85 GPM	1.1 GPM	1.5 GPM	2.3 GPM
		POSSIBLE FIXTURES				


DHX 8-2 Trend	7.2 kW	MAX. FLOW RATE	1 GPM	1.3 GPM	1.8 GPM	2.7 GPM
		POSSIBLE FIXTURES				

DHX 10-2 Trend	9.6 kW	MAX. FLOW RATE	1.4 GPM	1 GPM	1.7 GPM	1.2 GPM	2.3 GPM	1.5 GPM	3.6 GPM	2 GPM
		POSSIBLE FIXTURES	OR		OR	OR	OR	OR	OR	

DHX 12-2 Plus & Trend	12.0 kW	MAX. FLOW RATE	1.3 GPM	1.55 GPM	1.9 GPM	2.5 GPM
		POSSIBLE FIXTURES	OR	OR	OR	OR

DHX 15-2 Plus & Trend	14.4 kW	MAX. FLOW RATE	1.6 GPM	1.9 GPM	2.3 GPM	3 GPM
		POSSIBLE FIXTURES	OR	OR	OR	OR

Max. Flow Rates shown for 240V models are correct if installed with 240V service. Increase one model size if unit will be installed with 208V service.

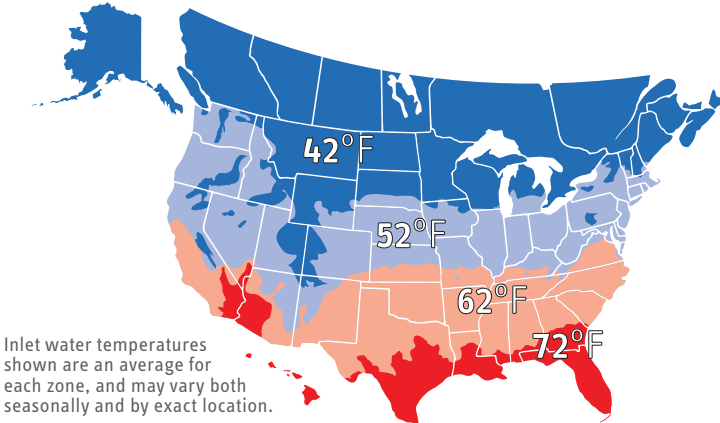

FIXTURES & FLOW RATES
for model possibilities and temp. for max. flow rate calculation

- SINGLE LAV SINK** 90°F (Range 0.5-1.5)
- SHOWER** 105°F (Range 1.0-2.5)
- KITCHEN SINK** 105°F (Range 1.0-2.2)

Higher temps reduce flow rates


Scroll for temp. rise charts. ↓

rev. 2.2024 | Due to our continuous process of engineering and technological advancement, specifications may change without notice.


DHX Trend & Plus

Temperature rise vs. flow rate curves

Temperature Rise vs. Flow Rate at Max Rated Voltage

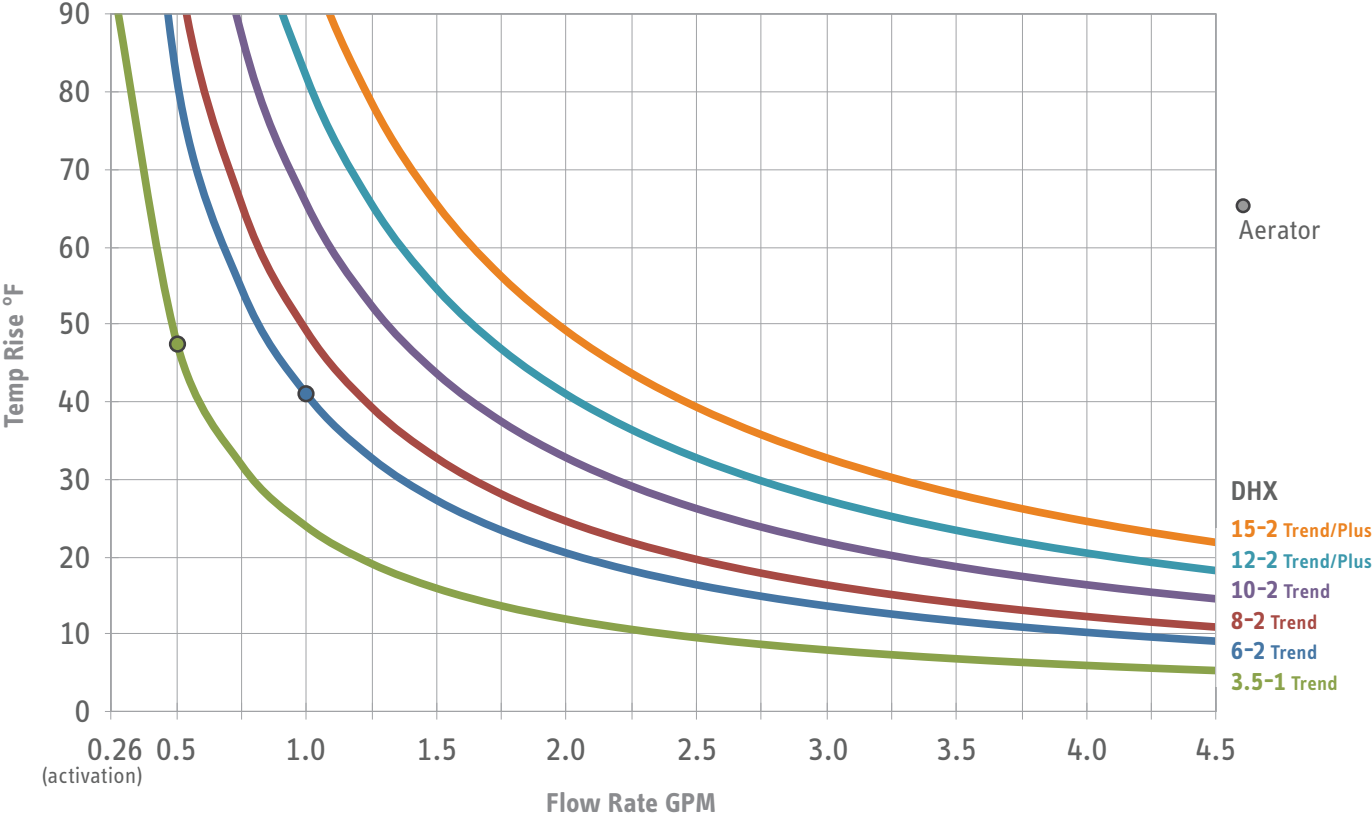

Temperature Rise vs. Flow Rate at 208 V

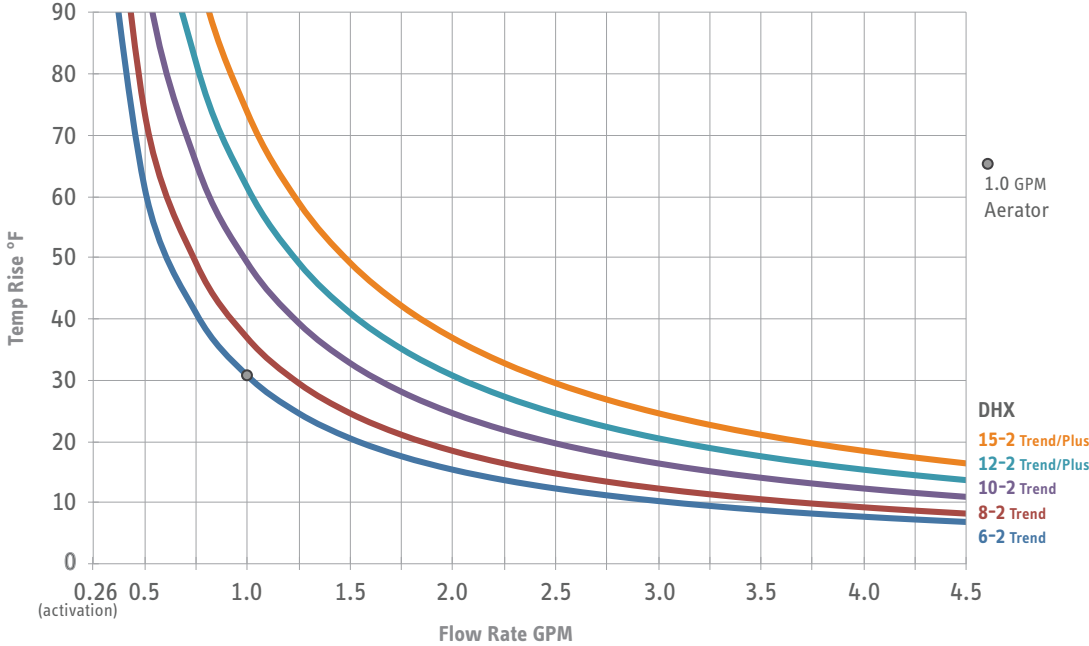

rev. 2.2024 | Due to our continuous process of engineering and technological advancement, specifications may change without notice.