

DHX Select


Electric Tankless Water Heater Sizing Guide

DHX 10 Select

9.6 kW MAX. FLOW RATE
POSSIBLE FIXTURES


42°F

1.4 GPM
OR
1 GPM




52°F

1.7 GPM
OR
1.2 GPM




62°F

2.3 GPM
OR
1.5 GPM



72°F


3.6 GPM
OR
2 GPM



DHX 15 Select

14.4 kW MAX. FLOW RATE
POSSIBLE FIXTURES


1.6 GPM
OR
1 GPM



1.9 GPM
OR
1 GPM



2.3 GPM
OR
1.5 GPM




3 GPM
OR
2 GPM



Flow rates shown are correct for installation with 240 V power.

Please contact technical support if installation will be with 208 V power.

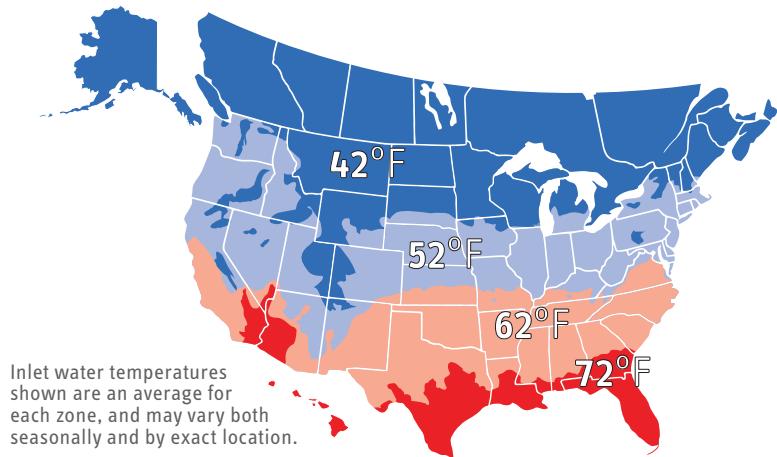

FIXTURES & FLOW RATES
for model possibilities and temp.
for max. flow rate calculation

SINGLE LAV SINK
(Range 0.5-1.5)



90°F

SHOWER
(Range 1.0-2.5)



105°F

KITCHEN SINK
(Range 1.0-2.2)



105°F

Higher temps reduce flow rates

DHX Trend & Plus

Temperature rise vs. flow rate curves

