

## DHX 15 Select Technical Specifications

### Technical Data



Certified to ANSI/UL Std. 499  
Conforms to CAN/CSA Std. C22.2 No. 64



Tested and certified by WQA  
against NSF/ANSI 372 for lead  
free compliance.



Model	DHX 15 Select	
Item no.	204812	
Phase - 50/60 Hz	1	
Voltage	240 V	208 V
Wattage	14.4 kW	10.8 kW
Amperage	60 A	52 A
Min. recommended circuit breaker size <sup>1</sup>	60 A	60 A
Min. recommended wire size <sup>2</sup>	6/2 AWG	
Minimum water flow to activate unit	0.264 gpm (1.0 l/min)	
Weight	5.5 lb (2.5 kg)	
Dimensions	Height 14 <sup>1</sup> / <sub>8</sub> " (360 mm) x Width 8" (202 mm) x Depth 4 <sup>5</sup> / <sub>16</sub> " (109 mm)	
Nominal water volume	0.07 gal (0.277 l)	
Max. permissible inlet temperature	149°F (65°C)	
Maximum permissible pressure	145 psi (10 bar)	
Water connections <sup>3</sup>	1/2" NPT	


1 Overcurrent protection sized at 100% of load. Tankless water heaters are considered a non-continuous load. Use only GFCI Class A circuit breakers.

2 Copper conductors with a temperature rating of 75°C or greater must be used. Conductors should be sized to maintain a voltage drop of less than 3% under load.

These are our recommendations. Check local codes for compliance if necessary.

Scroll for temp. rise charts. ↓

# DHX 15 Select Technical Specifications

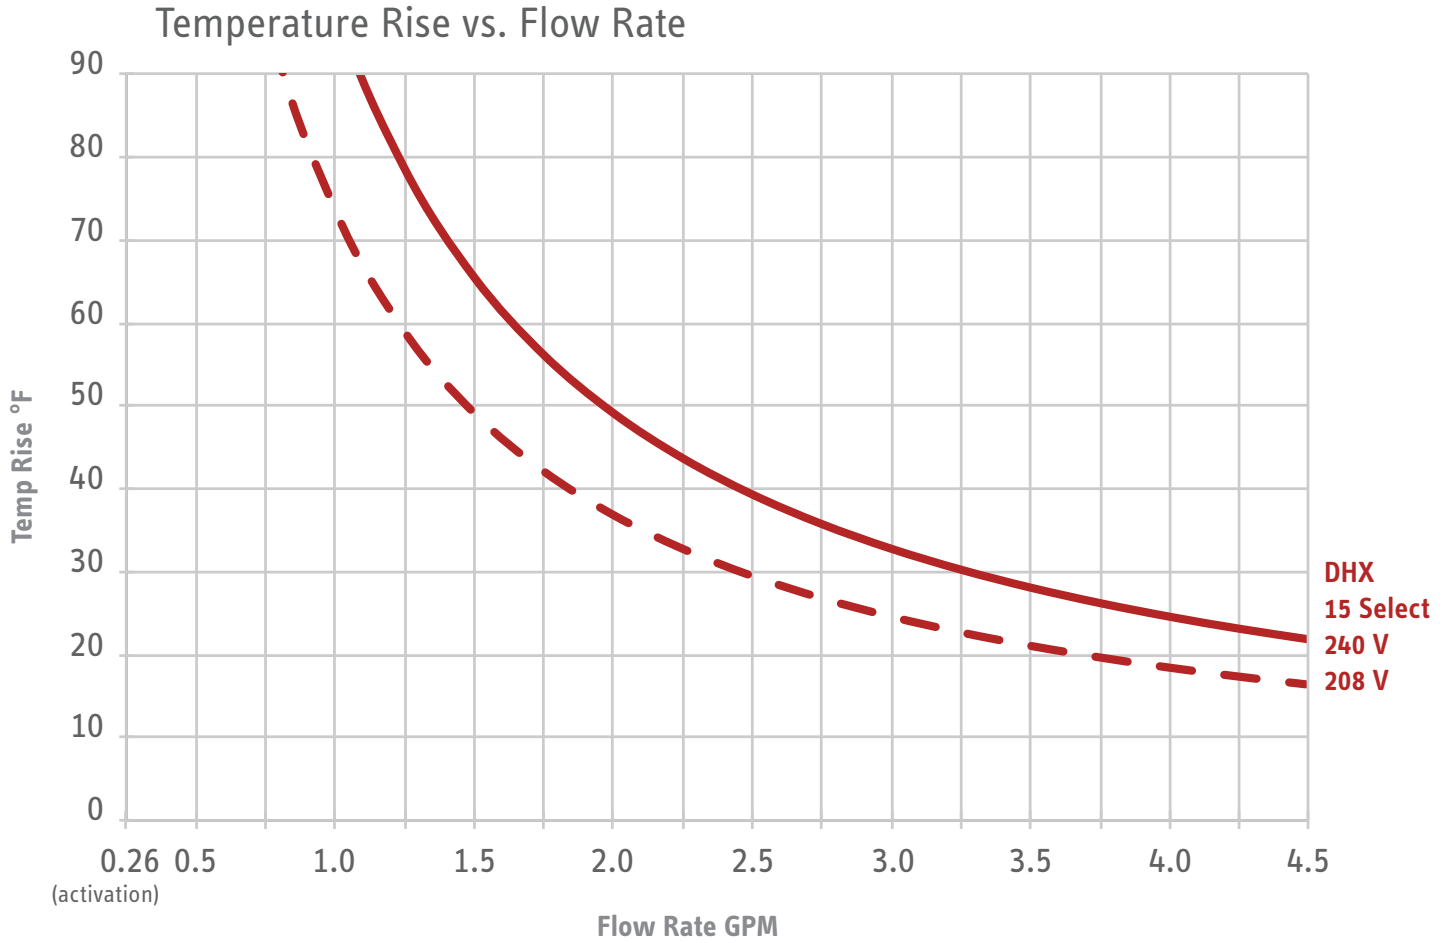

rev. 11.2021 | Due to our continuous process of engineering and technological advancement, specifications may change without notice.